
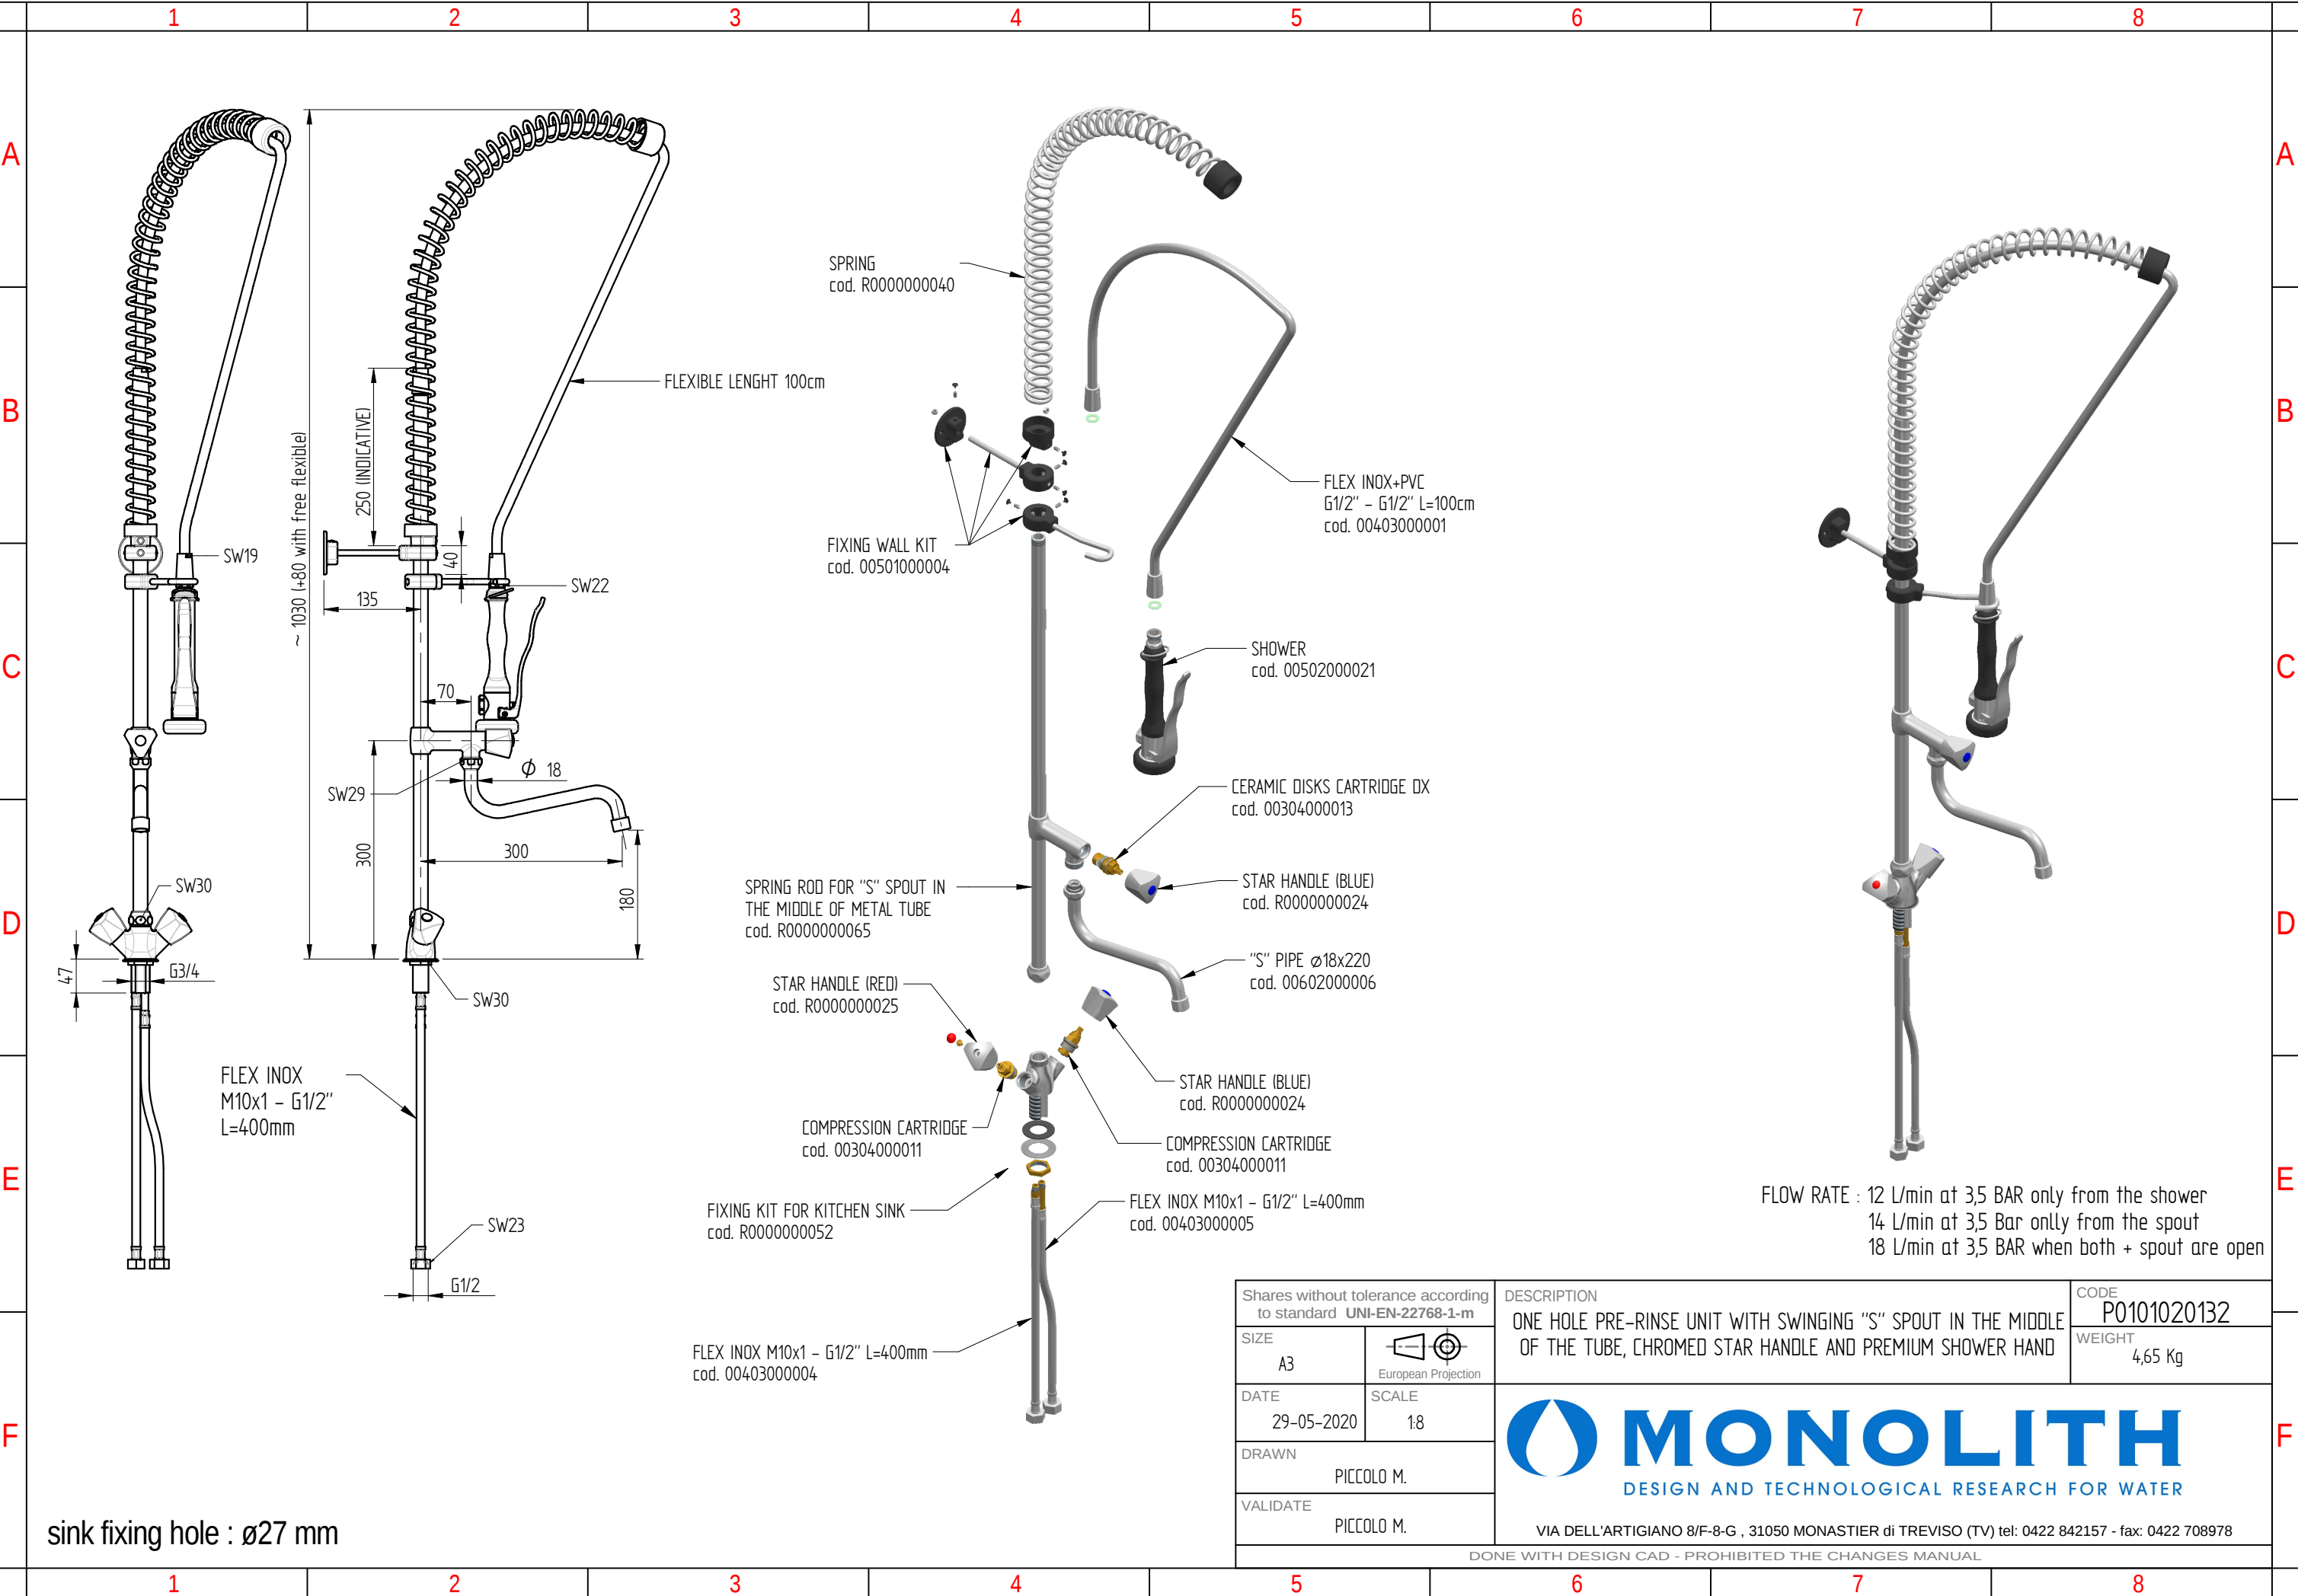




sink fixing hole : $\varnothing 27$ mm

FLOW RATE : 12 L/min at 3,5 BAR only from the shower
14 L/min at 3,5 Bar only from the spout
18 L/min at 3,5 BAR when both + spout are open

Shares without tolerance according to standard UNI-EN-22768-1-m		DESCRIPTION	CODE P0101020132
SIZE A3	 European Projection	ONE HOLE PRE-RINSE UNIT WITH SWINGING "S" SPOUT IN THE MIDDLE OF THE TUBE, CHROMED STAR HANDLE AND PREMIUM SHOWER HAND	WEIGHT 4,65 Kg
DATE 29-05-2020	SCALE 1:8	 MONOLITH DESIGN AND TECHNOLOGICAL RESEARCH FOR WATER	
DRAWN PICCOLO M.			
VALIDATE PICCOLO M.			
		VIA DELL'ARTIGIANO 8/F-8-G , 31050 MONASTIER di TREVISO (TV) tel: 0422 842157 - fax: 0422 708978	
DONE WITH DESIGN CAD - PROHIBITED THE CHANGES MANUAL			