



SOFTCOOKER XP S / SR

sous vide cooking system

- Apparecchio per la cottura a bassa temperatura con riscaldamento statico dell'acqua.
- Struttura in acciaio inox, vasca di cottura gastronorm in acciaio inox.
- Pratiche maniglie per il trasporto della vasca.
- Potenti resistenze corazzate a contatto del fondo della vasca.
- Sistema elettronico di controllo della temperatura con visualizzazione della temperatura e del tempo di esercizio.
- Stesso sistema di controllo del Softcooker con ΔT di 0,2°C:
 - 25 programmi memorizzabili.
 - Temperatura selezionabile in °C e °F.
 - Coperchio vasca fornito di serie.
- Versione R con rubinetto per lo scarico dell'acqua.

- *Low temperature cooking device with water static heating.*
- *Stainless steel structure and 1/1 GN made of stainless steel*
- *Practical handles to carry it easily*
- *Powerful shock-proof coated heating elements in contact with tank bottom*
- *Electronic control system of the temperature with working temperature display*
- *Same control system of Softcooker with ΔT of 0,2°C:*
 - *25 storable programs*
 - *Temperature setting in °C and °F.*
 - *Equipped with lid*
- *R versione with tap for discharging water.*



SOFTCOOKER XP S 1/1 GN



SOFTCOOKER XP S 2/3 GN



SOFTCOOKER XP S 2/3 GN




SOFTCOOKER XP S 1/1 GN



SOFTCOOKER XP SR 1/1 GN



SOFTCOOKER XP SR 2/3 GN

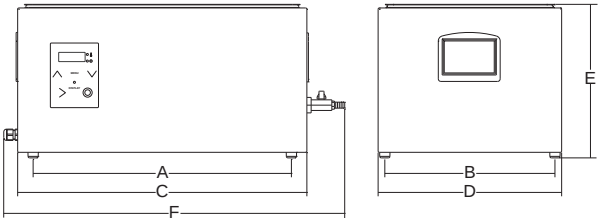

														
	watt	ph	°C	lt	lt	mm	mm	mm	mm	mm	mm	kg	mm	kg
Softcooker XP S 2/3 GN	1.150	1ph	24 ÷ 99,9	16.5	14	336	342	396	368	309	423	5	600x500x420	9
Softcooker XP S 1/1 GN	1.700	1ph	24 ÷ 99,9	26.5	22	508	342	568	368	309	595	16	600x500x420	20
Softcooker XP SR 2/3 GN	1.150	1ph	24 ÷ 99,9	19	17	336	342	396	368	309	470	5.5	600x500x420	9
Softcooker XP SR 1/1 GN	1.700	1ph	24 ÷ 99,9	29	25	508	342	568	368	309	642	16.5	600x500x420	20