


XB895


ELECTRIC





capacity	10 600x400
distance	80 mm
frequency	50 / 60 Hz
Voltage	400 V~ 3N
power	15,8 kW
heat power	-
Dimensions	860x882x1250
weight	112 Kg



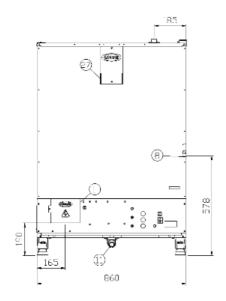

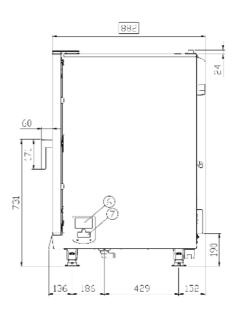

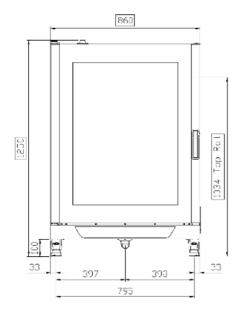

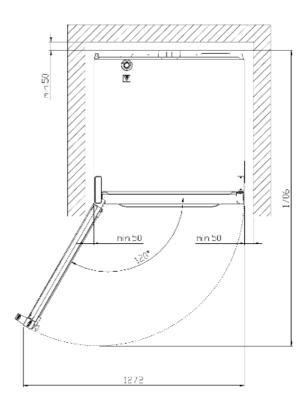



■ :Standard □ :Optional - :Not available	DYNAMIC	MANUAL
BAKING MODES		
Convection baking 30 °C - 260 °C	•	•
Convection baking + Humidity 48 °C a 260 °C	•	•
Maximum pre-heating temperature 260 °C	•	•
AIR DISTRIBUTION IN THE BAKING CHAMBER		
AIR.Plus technology: multiple auto-reversing fans	•	•
AIR.Plus technology: dual fan speeds	•	•
CLIMA MANAGEMENT IN THE BAKING CHAMBER		
DRY.Plus technology: rapid humidity extraction	•	•
STEAM.Plus technology: humidity setting from 20 to 100%, programmable by the user	•	-
STEAM.Plus technology: manual humidity activation	-	•
HIGH PERFORMANCE ATMOSPHERIC BURNER		
Spido.GAS™ technology: suitable for G20 / G25 / G30 / G31 gas types (only for gas ovens)	-	•
Spido.GAS™ technology: straight heat exchanger pipes for an easy service (only for gas ovens)	-	•
PATENTED DOOR		
Door hinges made of high durability and self-lubricating techno-polymer	•	•
Reversible door, even after the installation (not for 16 600x400 models)	•	•
Door docking positions at 60°-120°-180°	•	•
AUXILIARY FUNCTIONS		
99 baking programs memory, each one made of 3 baking steps + pre-heating	•	-
Protek.SAFE™ technology: maximum thermal efficiency and working safety (cool door glass and external surfaces)	•	•
Visualisation of the residual baking timeo	•	•
Continuous functioning «INF»	•	•
Visualisation of the nominal value of baking chamber temperature	•	-
«COOL» function for rapid chamber cooling	•	-
Temperature unit in °C or °F	•	_
TECHNICAL DETAILS		
Rounded stainless steel AISI 304 baking chamber for hygiene and ease of cleaning	•	•
Cavity lighting through external LED lights (only for 16 600x400 model)	-	

Cavity lighting through long-life halogen lights (only for 10 and 6 600x400 models)		•
High-durability carbon fibre door lock	•	•
Side opening internal glass to simplify the door cleaning	•	•
Stainless steel L-shaped rack rails	•	•
Light weight – heavy duty structure using innovative materials	•	•
Autodiagnostic system	•	-
USB and LAN port	0	-
Safety temperature switch	•	•